

Designed, engineered, and manufactured in our facility located in Le Center, Minnesota, equipped with modern engineering, fabrication and assembly capabilities.

Rugged Design

Engineered and built tough with powder coat paint galvanealed steel.

Full Load Tested

Every generator is 100% load tested in-house.

Honda GC160 Engine

The GC160 lives up to its reputation of the reliability and performance you expect.




VOLTAGE	STARTING WATTS	STARTING AMPS@ 120V	RUNNING WATTS	RUNNING AMPS@ 120V
120/240 1-PH	3,000	25	2,200	18

MOTOR STARTING (CODE G)	0.75 HP
DBA @ 7 METERS FULL LOAD	72
TOTAL HARMONIC DISTORTION	< 5%
MAIN CIRCUIT BREAKER	20A, 120 V
BONDED NEUTRAL	YES
120V RECEPTACLES	(2) NEMA 5-20 20A

ASSEMBLED IN	USA
EPA APPROVED	YES
CARB APPROVED	NO
TÜV CERTIFICATION	
CSA	YES
UNIT WARRANTY ⁽¹⁾	1 YEAR COMMERCIAL

RECEPTACLE PANEL

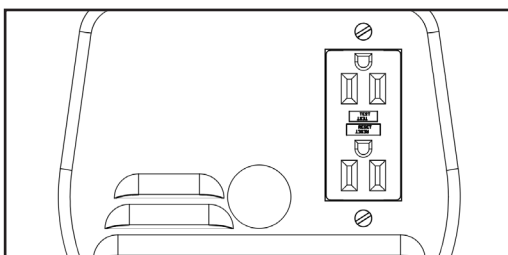

ENGINE

ENGINE BRAND	HONDA
ENGINE MODEL	GC160
ENGINE STARTER	RECOIL
ENGINE SPEED	3600 RPM
ENGINE CYLINDERS	SINGLE
ENGINE HP	4.6
FREQUENCY	60 HZ
IGNITION SYSTEM	TRANSISTORIZED MAGNETO

LUBRICATION	FULL-PRESSURE
BORE/STROKE	64.0 mm x 50.0 mm
DISPLACEMENT/TYPE	160CC/ OHV
LOW OIL PROTECTION	STANDARD
RECOMMENDED OIL ⁽²⁾	5W-30 SAE
OIL CAPACITY	0.61 QT
COMPRESSION RATIO	8.5:1

FUEL

FUEL TANK	2 QT
FULL LOAD RUN TIME	1.5 HRS
FUEL GAUGE	N/A

FUEL CONSUMPTION 100%	1.3 GAL/HR
--------------------------	------------


GENERATOR END

GENERATOR END BRAND	MECC ALTE
GENERATOR END MODEL	S15W-75
PHASE	SINGLE
VOLTAGE REGULATION	CAPACITOR +/- 5%
TEMPERATURE RISE	125/40°C
BRUSHLESS	YES
SPEED	3600 RPM

STATOR	2/3 PITCH
WINDINGS	100% COPPER
STATOR WINDING	DOUBLE LAYER CONCENTRIC
BEARINGS	SINGLE (MAINTENANCE FREE)
EFFICIENCY PEAK	71.4%
INSULATION	CLASS H
INGRESS PROTECTION	IP23

SHIPPING

SHIPPING DIMENSIONS (L x W x H)	25" x 19" x 19"
SHIP WEIGHT	72 LBS
FREIGHT CLASS	70

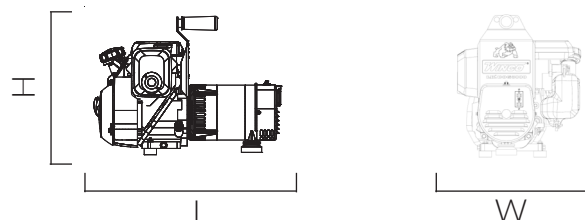

OPTIONAL ACCESSORIES

MAINTENANCE KIT	16200-000
PLUG-IN VOLT METER	24743-000

NOTES:

(1) For more warranty information, see operator's manual.

(2) The recommended oil is for normal applications.

See operator's manual for more oil recommendations.
Specifications are subject to change without notice.



Sales: 507-357-6821
Service: 507-357-6831

