

Designed, engineered, and manufactured in our facility located in Le Center, Minnesota, equipped with modern engineering, fabrication and assembly capabilities.

Full Load Tested

Every generator is 100% load tested in-house.




VOLTAGE	STANDBY WATTS	STANDBY AMPS@ 240V
120/240 1-PH	4800	20
MOTOR STARTING (CODE G)		1.5 HP
TOTAL HARMONIC DISTORTION		< 6%
CIRCUIT BREAKER		(2) 20A
120V RECEPTACLES		(1) NEMA 5-20 20A DUPLX
240V RECEPTACLES		(1) NEMA L14-30 30A
SHAFT DIAMETER		0.875"
SHAFT KEY WAY		.1875" x 1.406"
TUV CERTIFICATION		UL1004
ASSEMBLED IN		USA
UNIT WARRANTY ⁽¹⁾		1 YEAR

GENERATOR END


GENERATOR END BRAND	MECC ALTE
GENERATOR END MODEL	S16W-130
PHASE	SINGLE
VOLTAGE REGULATION	CAPACITOR +/- 5%
TEMPERATURE RISE	125/40°C
BRUSHLESS	YES
SPEED	3600 RPM
STATOR	2/3 PITCH
WINDINGS	100% COPPER
STYLE	TWO-BEARING
EFFICIENCY PEAK	77.6%
INSULATION PROTECTION	EG43 VARNISH
INGRESS PROTECTION	IP23 COVERS

SHIPPING

SHIPPING DIMENSIONS (L x W x H)	23.5" x 17" x 17"
SHIP WEIGHT	54 LBS
FREIGHT CLASS	65

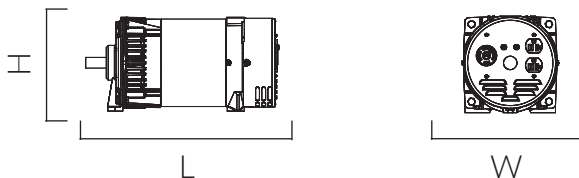

RECEPTACLE PANEL

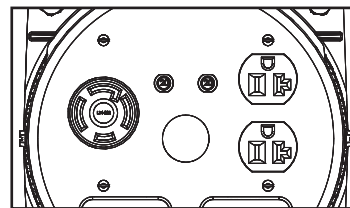

NOTES:
 (1) For more warranty information, see operator's manual.

Specifications are subject to change without notice.

Sales: 507-357-6821
 Service: 507-357-6831

